

HGC Fieldbus Adaptor

Model HFA100

OVERVIEW

HGC Fieldbus Adaptor (HFA) is an interface used to connect the HGM (HGC monitor) a Windows-based, PC application, to Yamatake's state of art analyzer, HGC (Heat value Gas Chromatograph) that operates on a FOUNDATION™ fieldbus H1 network. Users are able to configure, monitor and maintain the HGC all from the PC by simply connecting the HFA to the Fieldbus network.

FEATURES

1. User friendly

USB connection with the PC enables the HFA to establish communication with FOUNDATION™ fieldbus H1 very easily. Only by plugging the cable into the USB port on the PC, users can monitor HGC performance and they are also able to configure or adjust the HGC without any special preparation.

2. Portable

With its light weight and compact design, HFA can be carried with laptop PC so that user can use it whenever and wherever along the process to access HGC data.

3. Secured connection

The HFA is powered by the USB port of the PC. This ensures that there will be no disturbance to the power to the FOUNDATION™ fieldbus H1 when the HFA is connected while the H1 segment is running. A Link Master option also is provided for in-house configurations where only the HGC is connected to the H1.

4. Field proven technology

HFA, a FOUNDATION™ fieldbus H1 module, has been designed using Yamatake's Fieldbus technology, which has been proven out in the field over the years. Its functionality and performance have been thoroughly tested for reliability in communicating with the HGC.



FUNCTIONAL SPECIFICATIONS

Fieldbus port

FOUNDATION™ fieldbus

H1 (31.25 kb/sec.)

ISA S50.02-1992 & IEC 1158-2

Device class

Basic Device (default) or Link Master Device

Node address

0xFC (default)

Terminator switch

Off (default) or On

USB port

USB 1.1 Device Class

USB Cable 1 m (Standard Accessory)

Operating requirements

OS Windows 2000 (Service Pack 3 required) / XP
HGM (HGC Gas Chromatograph Monitor) Version 4.0 or later

*** HGM comes standard with the HGC

Ambient temperature limits

0°C to 50°C (32°F to 122°F)

Ambient humidity range

0 to 95% RH

CE certification

Electromagnetic compatibility
(89/336/EEC,92/31/EEC,93/68/EEC)

PHYSICAL SPECIFICATIONS

Case Material

Stainless Steel

Dimensions

W: 71 mm × D: 98 mm × H: 20.5 mm
(W: 2.8 in. × D: 3.9 in. × H: 0.8 in.)

Weight

0.25 kg (0.55 lbs)

INSTALLATION

Power supply

USB Port supply (5 V from PC)

Power consumption

Typ. 1 VA (from PC)

Environmental classification

For indoor use only

Standard accessories

USB Cable: Length 1m


HFA User's Manual

MODEL SELECTION

HGC Fieldbus Adaptor

Model HFA100

DIMENSIONS

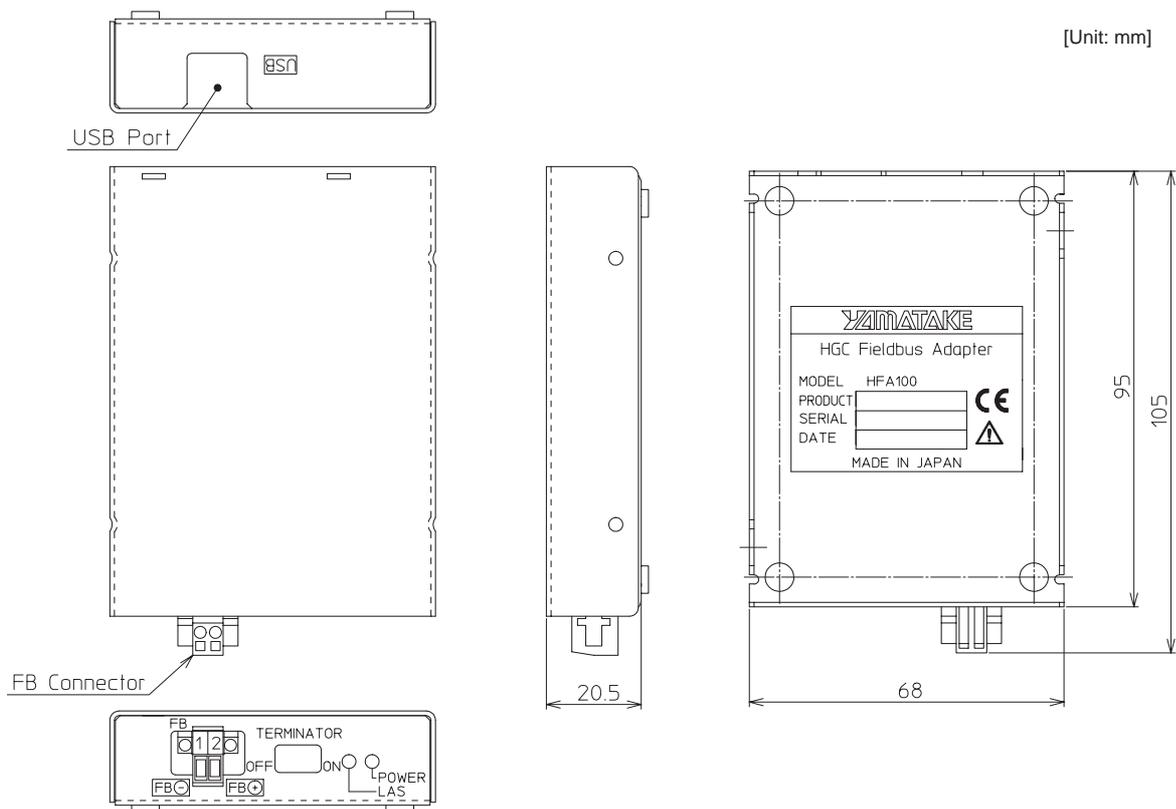

Yamatake Corporation

Totate international Building
2-12-19 Shibuya
Shibuya-ku, Tokyo 150-8316
Japan
Tel : 81-3-3486-2310
Fax : 81-3-3486-2593



Savemation

Saving through Automation